

GENERATOR DATA

JUNE 13, 2017

For Help Desk Phone Numbers [Click here](#)

Selected Model			
Engine: 3516	Generator Frame: 806	Genset Rating (kW): 1500.0	Line Voltage: 480
Fuel: Diesel	Generator Arrangement: 7C1626	Genset Rating (kVA): 1875.0	Phase Voltage: 277
Frequency: 60	Excitation Type: Permanent Magnet	Pwr. Factor: 0.8	Rated Current: 2255.3
Duty: STANDBY	Connection: SERIES STAR	Application: EPG	Status: Current
<small>Version: 38901 /38798 /38285 /7026</small>			

Generator Specification			Generator Efficiency		
Frame: 806	Type: SR4	No. of Bearings: 1	Per Unit Load	kW	Efficiency %
Winding Type: RANDOM WOUND	Flywheel: 521.0	Housing: 00			
Connection: SERIES STAR	No. of Leads: 6	Wires per Lead: 8	0.25	375.0	92.7
Phases: 3	Generator Pitch: 0.7333		0.5	750.0	95.3
Poles: 4			0.75	1125.0	95.7
Sync Speed: 1800			1.0	1500.0	95.6

Reactances	Per Unit	Ohms
SUBTRANSIENT - DIRECT AXIS X _d	0.1872	0.0230
SUBTRANSIENT - QUADRATURE AXIS X _q	0.1766	0.0217
TRANSIENT - SATURATED X _d	0.2832	0.0348
SYNCHRONOUS - DIRECT AXIS X _d	3.3350	0.4098
SYNCHRONOUS - QUADRATURE AXIS X _q	1.6073	0.1975
NEGATIVE SEQUENCE X ₂	0.1823	0.0224
ZERO SEQUENCE X ₀	0.0448	0.0055


Time Constants	Seconds
OPEN CIRCUIT TRANSIENT - DIRECT AXIS T _{do}	4.0140
SHORT CIRCUIT TRANSIENT - DIRECT AXIS T _d	0.3412
OPEN CIRCUIT SUBTRANSIENT - DIRECT AXIS T _{do}	0.0145
SHORT CIRCUIT SUBTRANSIENT - DIRECT AXIS T _d	0.0109
OPEN CIRCUIT SUBTRANSIENT - QUADRATURE AXIS T _{qo}	0.0111
SHORT CIRCUIT SUBTRANSIENT - QUADRATURE AXIS T _q	0.0088
EXCITER TIME CONSTANT T _e	0.1338
ARMATURE SHORT CIRCUIT T _a	0.0423

Short Circuit Ratio: 0.38	Stator Resistance = 0.0027 Ohms	Field Resistance = 0.795 Ohms
---------------------------	---------------------------------	-------------------------------

Voltage Regulation		Generator Excitation		
Voltage level adjustment: +/-	5.0%		No Load	Full Load, (rated) pf
Voltage regulation, steady state: +/-	0.5%			Series Parallel
Voltage regulation with 3% speed change: +/-	0.5%			
Waveform deviation line - line, no load: less than	5.0%	Excitation voltage:	9.28 Volts	47.93 Volts
Telephone influence factor: less than	50	Excitation current	2.43 Amps	10.32 Amps
				Volts Amps

Selected Model			
Engine: 3516	Generator Frame: 806	Genset Rating (kW): 1500.0	Line Voltage: 480
Fuel: Diesel	Generator Arrangement: 7C1626	Genset Rating (kVA): 1875.0	Phase Voltage: 277
Frequency: 60	Excitation Type: Permanent Magnet	Pwr. Factor: 0.8	Rated Current: 2255.3
Duty: STANDBY	Connection: SERIES STAR	Application: EPG	Status: Current
<small>Version: 38901 /38798 /38285 /7026</small>			

Generator Mechanical Information		
Center of Gravity		
Dimension X	-850.1 mm	-33.5 IN.
Dimension Y	0.0 mm	0.0 IN.
Dimension Z	0.0 mm	0.0 IN.
<ul style="list-style-type: none"> "X" is measured from driven end of generator and parallel to rotor. Towards engine fan is positive. See General Information for details "Y" is measured vertically from rotor center line. Up is positive. "Z" is measured to left and right of rotor center line. To the right is positive. 		
Generator WT = 3330 kg * Rotor WT = 1324 kg * Stator WT = 2006 kg 7,341 LB 2,919 LB 4,422 LB		
Rotor Balance = 0.0508 mm deflection PTP Overspeed Capacity = 150% of synchronous speed		

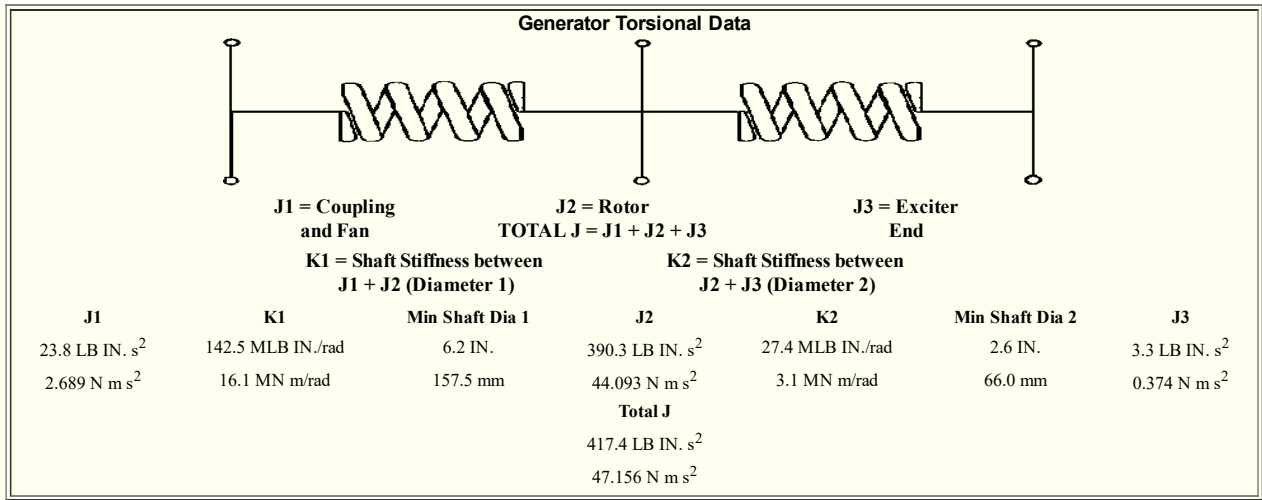


Selected Model			
Engine: 3516	Generator Frame: 806	Genset Rating (kW): 1500.0	Line Voltage: 480
Fuel: Diesel	Generator Arrangement: 7C1626	Genset Rating (kVA): 1875.0	Phase Voltage: 277
Frequency: 60	Excitation Type: Permanent Magnet	Pwr. Factor: 0.8	Rated Current: 2255.3
Duty: STANDBY	Connection: SERIES STAR	Application: EPG	Status: Current
<small>Version: 38901 / 38798 / 38285 / 7026</small>			

Generator Cooling Requirements - Temperature - Insulation Data	
Cooling Requirements:	Temperature Data: (Ambient 40 °C)
Heat Dissipated: 69.0 kW	Stator Rise: 130.0 °C
Air Flow: 0.0 m ³ /min	Rotor Rise: 130.0 °C
Insulation Class: H	
Insulation Reg. as shipped: 100.0 MΩ minimum at 40 °C	
Thermal Limits of Generator	
Frequency:	60 Hz
Line to Line Voltage:	480 Volts
B BR 80/40	1401.0 kVA
F BR -105/40	1688.0 kVA
H BR - 125/40	1875.0 kVA
F PR - 130/40	1875.0 kVA

Selected Model			
Engine: 3516	Generator Frame: 806	Genset Rating (kW): 1500.0	Line Voltage: 480
Fuel: Diesel	Generator Arrangement: 7C1626	Genset Rating (kVA): 1875.0	Phase Voltage: 277
Frequency: 60	Excitation Type: Permanent Magnet	Pwr. Factor: 0.8	Rated Current: 2255.3
Duty: STANDBY	Connection: SERIES STAR	Application: EPG	Status: Current
<small>Version: 38901 / 38798 / 38285 / 7026</small>			


Starting Capability & Current Decrement Motor Starting Capability (0.4 pf)

SKVA	Percent Volt Dip
177	2.5
363	5.0
559	7.5
765	10.0
984	12.5
1,216	15.0
1,461	17.5
1,722	20.0
2,000	22.5
2,296	25.0
2,613	27.5
2,953	30.0
3,317	32.5
3,710	35.0
4,134	37.5
4,593	40.0

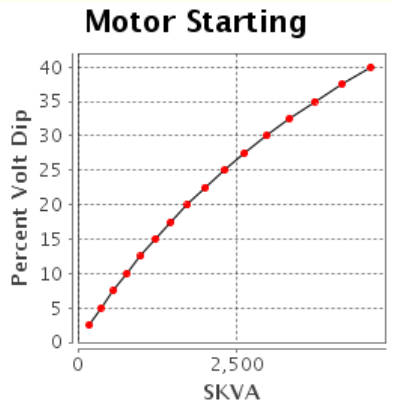

Current Decrement Data

E Time Cycle	AMP
0.0	11,970
1.0	8,496
2.0	7,476
3.0	7,015
4.0	6,686
5.0	6,397
7.5	5,748
10.0	5,175
12.5	4,667
15.0	4,218
20.0	3,469
25.0	3,555
30.0	3,948
35.0	4,343
40.0	4,701
45.0	5,026

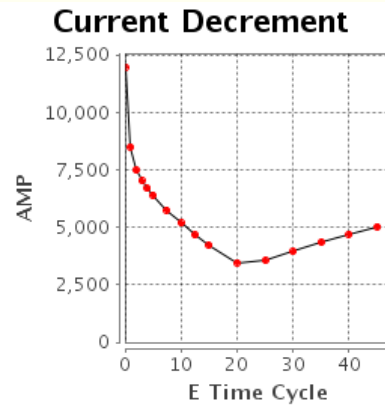

Instantaneous 3 Phase Fault Current: 11970 Amps

Instantaneous Line - Line Fault Current: 10515 Amps

Instantaneous Line - Neutral Fault Current: 16229 Amps

Engine: 3516
 Fuel: Diesel
 Frequency: 60
 Duty: STANDBY

Generator Frame: 806
 Generator Arrangement: 7C1626
 Excitation Type: Permanent Magnet
 Connection: SERIES STAR

Selected Model


Genset Rating (kW): 1500.0
 Genset Rating (kVA): 1875.0
 Pwr. Factor: 0.8
 Application: EPG

Line Voltage: 480
 Phase Voltage: 277
 Rated Current: 2255.3
 Status: Current

Version: 38901 / 38798 / 38285 / 7026


Generator Output Characteristic Curves
 Open Circuit Curve

Field Current	Line - Line Volt
0.0	0
12.7	288
15.0	336
17.6	384
20.8	432
25.4	480
33.3	528
48.9	576
82.3	624
156.6	672

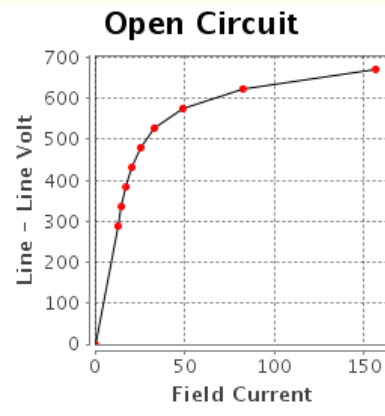

Short Circuit Curve

Field Current	Armature Current
0.0	0
61.1	1,353
71.2	1,579
81.4	1,804
91.6	2,030
101.8	2,255
111.9	2,481
122.1	2,706
132.3	2,932
142.5	3,157

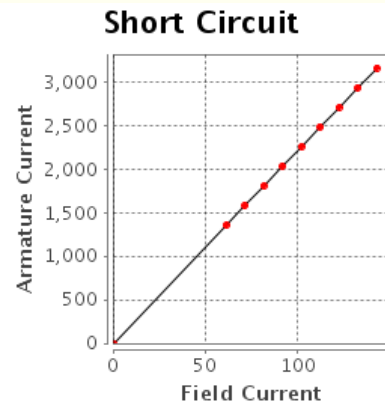

Engine: 3516
 Fuel: Diesel
 Frequency: 60
 Duty: STANDBY

Generator Frame: 806
 Generator Arrangement: 7C1626
 Excitation Type: Permanent Magnet
 Connection: SERIES STAR

Selected Model

Genset Rating (kW): 1500.0
 Genset Rating (kVA): 1875.0
 Pwr. Factor: 0.8
 Application: EPG


Line Voltage: 480
 Phase Voltage: 277
 Rated Current: 2255.3
 Status: Current

Version: 38901 / 38798 / 38285 / 7026

Generator Output Characteristic Curves


Zero Power Factor Curve

Field Current	Line - Line Volt
101.8	0
118.9	240
122.4	288
127.6	336
136.7	384
154.9	432
194.4	480
283.3	528
486.4	576
953.3	624

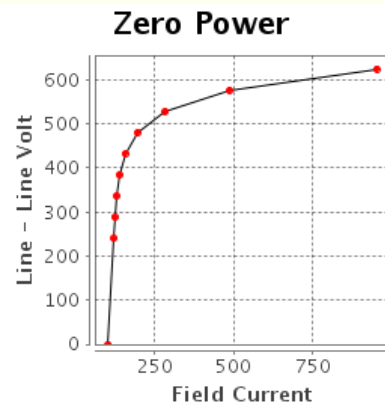

Air Gap Curve

Field Current	Line - Line Volt
0.0	0
12.6	288
14.7	336
16.7	384
18.8	432
20.9	480
23.0	528
25.1	576
27.2	624
29.3	672

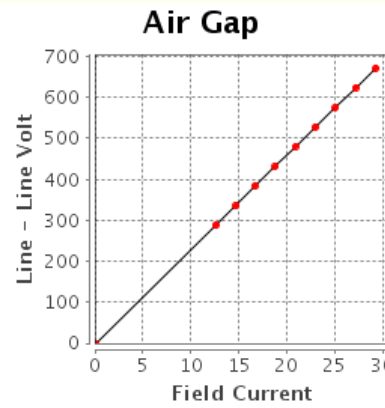

Engine: 3516
 Fuel: Diesel
 Frequency: 60
 Duty: STANDBY

Generator Frame: 806
 Generator Arrangement: 7C1626
 Excitation Type: Permanent Magnet
 Connection: SERIES STAR

Selected Model

Genset Rating (kW): 1500.0
 Genset Rating (kVA): 1875.0
 Pwr. Factor: 0.8
 Application: EPG

Line Voltage: 480
 Phase Voltage: 277
 Rated Current: 2255.3
 Status: Current

Version: 38901 / 38798 / 38285 / 7026

Reactive Capability Curve

[Click to view Chart](#)

Engine: 3516
 Fuel: Diesel
 Frequency: 60
 Duty: STANDBY

Generator Frame: 806
 Generator Arrangement: 7C1626
 Excitation Type: Permanent Magnet
 Connection: SERIES STAR

Selected Model

Genset Rating (kW): 1500.0
 Genset Rating (kVA): 1875.0
 Pwr. Factor: 0.8
 Application: EPG

Line Voltage: 480
 Phase Voltage: 277
 Rated Current: 2255.3
 Status: Current

Version: 38901 / 38798 / 38285 / 7026

General Information

DM7802

GENERATOR GENERAL INFORMATION

I. GENERATOR MOTOR STARTING CAPABILITY CURVES

A. THE MOTOR STARTING CURVES ARE REPRESENTATIVE OF THE DATA OBTAINED BY THE FOLLOWING PROCEDURE:

1. THE CATERPILLAR GENERATOR IS DRIVEN BY A SYNCHRONOUS DRIVER.
2. VARIOUS SIZE THREE PHASE INDUCTION MOTORS (NEMA CODE F) ARE STARTED ACROSS THE LINE LEADS OF THE UNLOADED GENERATOR.
3. THE RESULTING VOLTAGE DIPS ARE RECORDED WITH AN OSCILLOSCOPE.
4. MOTOR HORSEPOWER HAS BEEN CONVERTED TO STARTING KILOVOLT AMPERES (SKVA).
5. RECORDED VOLTAGE DIPS HAVE BEEN EXPRESSED AS A OF GENERATOR RATED VOLTAGE.

II. USE OF THE MOTOR STARTING CAPABILITY CURVES.

A. CALCULATE THE SKVA REQUIRED BY THE MOTOR FOR FULL VOLTAGE STARTING ACROSS THE LINE IF THE VALUE IS NOT LISTED ON THE MOTOR DATA PLATE.

1. MOTORS CONFORMING TO NEMA STANDARDS
MULTIPLY THE MOTOR HORSEPOWER BY THE NEMA SKVA/HP FIGURE. FOR NEMA CODE F, USE 5.3 SKVA/HP; FOR NEMA CODE G, USE 6.0 SKVA/HP.

2. ALL OTHER MOTORS:

MULTIPLY THE RATED VOLTAGE BY THE LOCKED ROTOR AMPERE AND BY 0.001732. (IF THE LOCKED ROTOR AMPERES ARE NOT LISTED, MULTIPLY THE FULL LOAD (RUNNING) AMPERES BY B. USE THE ABOVE SKVA WITH THE MOTOR STARTING TABLE.

1. ACROSS LINE STARTING:

READ ACROSS THE ROW OF "ACROSS THE LINE STARTING SKVA IF THE DESIRED VALUE OF SKVA IS NOT GIVEN, CALCULATE THE DIP BY FINDING THE PROPER SKVA INTERVAL AND INTERPOLATING AS FOLLOWS:

SKVA1 IS THE SKVA TABLE ENTRY JUST SMALLER THAN THE DESIRED SKVA, DIP1 IS THE DIP FOR SKVA2, AND SKVA2 IS THE SKVA TABLE ENTRY JUST GREATER THAN THE DESIRED SKVA. THE DIP (IN PERCENT) AT THE DESIRED SKVA IS:

$$\text{DIP} = \text{DIP1} + (\text{SKVA} - \text{SKVA1}) * 2.5 / (\text{SKVA2} - \text{SKVA1})$$

NOTE: VOLTAGE DIPS GREATER THAN 35% MAY CAUSE MAGNETIC CONTACTORS TO DROP OUT.

2. REDUCED VOLTAGE STARTING:

REFER TO THE FOLLOWING TABLE. MULTIPLY THE CALCULATE ACROSS LINE SKVA BY THE MULTIPLIER LISTED FOR THE SPECIFIC STARTING METHOD. APPLY THE RESULT TO THE STARTING TABLE AS IN II A, TO CALCULATE THE EXPECTED VOLTAGE DIP:

TYPE OF REDUCED VOLTAGE STARTING	MULTIPLY LINE SKVA BY
80% TAP	.80
65% TAP	.65
50% TAP	.50
45% TAP	.45
Wye start, delta run	.33

AUTOTRANSFORMER

NOTE: REDUCE VOLTAGE STARTING LOWERS THE MAXIMUM REQUIRED MOTOR skVA.

3. Part winding starting:

Most common is half-winding start, full-winding run.

Multiply the full motor, across line starting skVA

by 0.6. Apply the result to the selected curve as

in ii. A above. Read the expected voltage dip, for

the required skVA.

III. DEFINITION:

A. GENERATOR TERMS

MODEL: Engine Sales model

ENG TYPE: DI = Direct Injection,

NA = Naturally aspirated, etc

HZ: Running frequency, hertz

RATING TYPE: PP, SB (prime power or standby)

KW: Base rating electrical kilowatts (ekW)

VOLTS: Rating terminal, line to line

GEN ARR: Cat generator arrangement part number
GEN FRAME: Generator frame size designation
CONN: Generator output connection
(star, wye, delta, ect.)
POLES: Number of pole pieces on rotor.
(eg. A 4 pole generator run at 1800)
RPM will produce 60 Hz alternating current. A 6 pole generator run at 1200 RPM will produce 60 Hz alternating current.)

B. GENERATOR TEMPERATURE RISE:

The indicated temperature rise indicated the NEMA limits for standby or prime power applications. These rises are used for calculating the losses and efficiencies and are not necessarily indicative of the actual temperature rise of a given machine.

C. CENTER OF GRAVITY

The specified center of gravity is for the generator only. For single bearing, and two bearing close coupled generators, the center of gravity is measured from the generator/engine flywheel housing interface and from the centerline of the rotor shaft.

For two bearing, standalone generators, the center of gravity is measured from the end of the rotor shaft and from the centerline of the rotor shaft.

For two bearing, standalone generators, the center of gravity is measured from the end of the rotor shaft and from the centerline of the rotor shaft.

D. GENERATOR DECREMENT CURRENT CURVES

The generator decrement current curve gives the symmetrical current supplied by the generator for a three phase bolted fault at the generator terminals. Generators equipped with the series boost attachment or generators with PM excitation system will supply 300% of rated current for at least 10 seconds.

E. GENERATOR EFFICIENCY CURVES

The efficiency curve is representative of the overall generator efficiency over the normal range of the electrical load and at the specified parameters. This is not the overall engine generator set efficiency curve.

Caterpillar Confidential: **Green**

Content Owner: Commercial Processes Division

Web Master(s): [PSG Web Based Systems Support](#)

Current Date: 6/13/2017, 9:04:57 AM

© Caterpillar Inc. 2017 All Rights Reserved.

[Data Privacy Statement](#).